



PANELMONTERT SUMMER SERIE M22

812500405

ESK Summer Ø30mm 65dB 12-24V AC/DC
(EL6202990)

- Opp til 105 dB
- Justerbar volum
- Fast eller pulserende tone
- Montering i 22,5mm eller 30,5mm hull



PRODUKTBESKRIVELSE

Panelmontert summer med bredt spenningsområde og høy kapslingsklasse, IP65. Utmerket om man ønsker å påkalle ekstra oppmerksomhet.

TEKNISKE DATA

Antall tilvalgsmoduler	0 pc
Antall toner	2 pc
Diameter	30 mm
Farge hus	Svart
IP-klasse	IP65
Koblingsklemme	2,5 mm ²
Lydnivå maks.	65 dB
Lydnivå min.	65 dB
Matespenning AC/DC maks.	24 V
Matespenning AC/DC min.	10 V
Nominell strøm maks.	0,04 A
Nominell strøm min.	0,04 A
Temperaturområde fra	-25 °C
Temperaturområde til	60 °C

Tonfrekvens maks.

3500 Hz



Vekt

30 g

Tone table

ESK

La	N	Lb
X	X	X
X	X	X

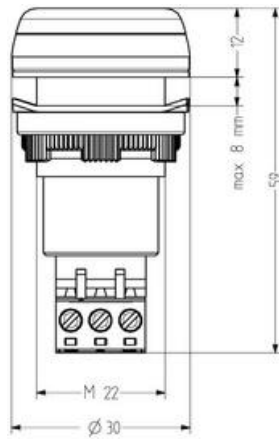

The sound pressure decreases by 6 dB when doubling the distance; the following distance table is to be seen as indication, as also factors like tone type, wind speed, wind direction, humidity, weather conditions etc. do influence the sound pressure level.

Distance (m)	Sound pressure dB (A)
1	65 70 75 80 85 90 92 94 96 100 102 104 106 108 110 112 114 116 118 120
2	59 64 69 74 79 84 88 88 90 92 94 96 98 100 102 104 106 108 110 112 114
3	55 60 65 70 75 80 82 84 86 88 90 92 94 96 98 100 102 104 106 108 110
5	51 56 61 66 71 76 78 80 82 84 86 88 90 92 94 96 98 100 102 104 106
10	45 50 55 60 65 70 72 74 76 78 80 82 84 86 88 90 92 94 96 98 100
20	39 44 49 54 59 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94
30	35 40 45 50 55 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90
50	36 41 46 51 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86
100	40 45 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80
200	39 44 46 48 50 52 54 56 58 60 62 64 66 68 70 72 74
500	38 42 44 46 48 50 52 54 56 58 60 62 64 66

The sound pressure decreases by 6 dB when doubling the distance



Justerbar volym med hjälp av potentiometer, (ej ESK.)

