

2-POLT C12 RELE

Serie IRC

C12A21X12A

Interfacerele IRC 2-pol 5A LED 12V AC (EL4379103)

- 5 A
- Robust flatstift
- Fargekodet testknapp



PRODUKTBESKRIVELSE

TEKNISKE DATA

INNGANGSDATA

Arbeidsområde Un	0,8-1,10
Spoleffekt	1,1 VA
Spolespenning AC	12 V AC
Spenning min.	0,6 V
Overspenning UNX maks.	1,1
Tilslagstid	10 ms

UTGANGSDATA

Antall kontakter	2
Kontaktmateriale	AgNi + 0,2 μ Au
Bryteevne spenning	250 V
Bryteevne strøm	5 A
Anbefalt last maks.	5 A/250 V AC 1; 0,5A/110 V DC-1
Anbefalt last min.	10 mA/10 V
Mekanisk levetid	AC: 10Mill/. DC: 20 Mill
Støtstrøm (20ms)	15 A
Bounce-tid	1
Fraslagstid	5 ms

Fraslagstid + bounce-tid

8 ms

GENERELL DATA

IP-klasse

IP40

Isolasjon kontakt/kontakt

3000 V

Isolasjon kontakt/spole

5000 V

Skrusokkel

S-12

Frekvens


50 Hz

Tilvalg spole

X (LED)


Vekt

21 g

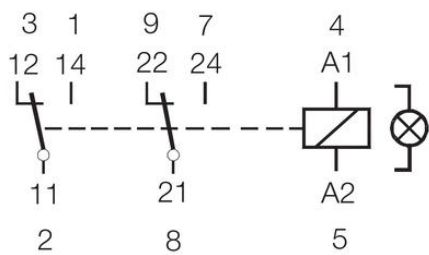



C12-A21X

5A 250V AC-1
5A 30V DC-1



A2 — A1

02



CE EAC

Made in India

