


VM-3

3 ventils manifold

VM-3

- Komplet SS316
- Maks. 420 bar
- PTFE eller grafitt pakning

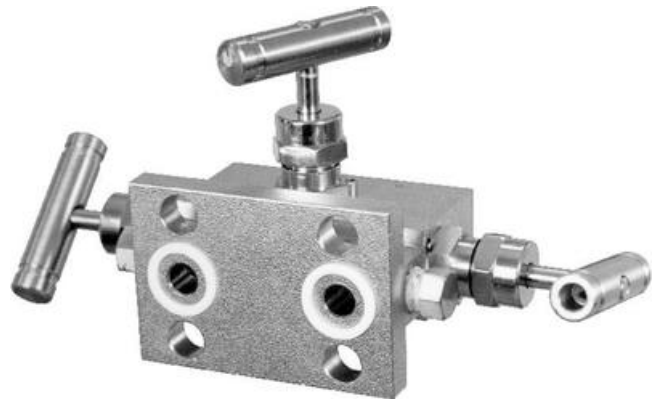

PRODUKTBESKRIVELSE

3-veis manifold brukes hvor en relativ transmitter er installert. Manifolden kommer i SS316 med PTFE pakning, som opsjon kan den skaffes med grafitt pakning. For temperaturgraf vennligst se datablad.

OPSJON

- Grafitt pakning
- Oksygenvasket

TEKNISKE DATA

Materiale	SS316
Materiale medieberørte deler	Grafitt, PTFE
Tilkobling	1/2" NPT
Trykkområde maks.	420 bar
Vekt	1,8 kg

Ordering procedure	
Valve manifold: 3-valve – VM-3 / <i>h</i> / <i>j</i> / <i>k</i> / <i>l</i> 2-valve – VM-2 / <i>h</i> / <i>j</i> / <i>k</i> / <i>l</i> Special version: R – non-structural versions (only VM-3) RC – constructional versions Graphite – graphite pin packing Tiem – valve adapted to contact with oxygen	Code Product A Set of M10 screws for fitting the transmitter B Set of 7/16" x 25 mm screws for fitting the transmitter C Set of 7/16" x 25 mm screws for fitting the transmitter with covers D Set of covers E Set of weldable stainless steel connectors (316A3) F Set of weldable steel connectors (K11562) G Set of connectors with 012 clamping ring H Set of connectors with 014 clamping ring I Handle for mounting the valve